



PRODUITS

SYSTÈMES D'INTERCOM ET SONNETTES

Systeme Android & systeme IP & systeme analogique

SYSTÈME ANDROID

Interphone vidéo/Sonettes

SYSTÈMES VILLA

SYSTÈMES MULTI-APPARTEMENTS

- ✓ Compatible avec les applications
- ✓ Modèle à écran tactile complet
- ✓ Connexion du commutateur POE
- ✓ Personnaliser l'interface utilisateur et la langue
- ✓ Appel



AZZJ4A



AZZJ4B



AZZJ4C



AZZJ10D



AZZJ10A



AZZJ10B



AZZJ10C



AZZJ8A



AZCPRL8C



AZBS4A

SYSTÈME ANDROID

Visiophone étanche IP54



- ✓ Écran entièrement tactile de 8 pouces
- ✓ Appel, interphone, déverrouillage, surveillance
- ✓ Réglage local du nom et du numéro de l'appartement
- ✓ Prise en charge de la connexion jusqu'à 200 appartements
- ✓ 2 caméras HD, reconnaissance faciale en direct
- ✓ Vision nocturne avec lumière led
- ✓ Interphone TCP/IP entièrement numérique
- ✓ Système Android, processeur ARM
- ✓ Interface utilisateur et langue personnalisées
- ✓ Installation murale/encastée et étanche IP54
- ✓ Prise en charge de la connexion sans moniteurs intérieurs)
- ✓ Carte RFID/Mot de passe/Reconnaissance faciale/Mobile




AZCPRL8C



888QFJ7G

AZCPRL8C	
Material	Aluminum
Color	Silver/Champagne
Camera	200W(1080P)
Screen Display	8 inch screen, 800*1280 px
View Angle	120°
Power supply	DC12V
Working Temp.	-20°C~70°C
Card Type	IC Card, M1, S50, 13.56MHZ
Protection grade	IP54
Face recognition	Recognition rate 0.5 seconds;
Dimension	253mm*125mm*21mm

888QFJ7G	
Color	Silver/Gold/Gray/Black
Screen Display	7 inch screen
Resolution	800*480px
Screen Type	Touch screen / Touch button optional
Communication	RJ45-TCP/IP
Power	POE Switch (24V)
System	Linux system
Elevator	Elevator control device
Zone	Eight defense zones
Working Temp.	-20°C~70°C
Dimension	200*140*16mm

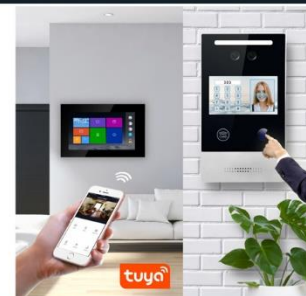

SYSTÈME IP

SYSTÈMES VILLA



888QBSA



888QFJ7F

888QBSA	
Material	Aluminum
Color	Silver
Solution	720P
System	Linux system
Power supply	DC12V
Working Temp.	-20°C~70°C
Card Type	IC Card, M1, S50, 13.56MHZ
Protection grade	IP33
Unlock	Password, RFID card & Indoor monitor
Dimension	154*85*15.5mm
Installation	143*78.5*35mm

888QFJ7F	
Color	Silver/Gold
Screen Display	7 inch screen
Resolution	800*4801 px
Screen Type	Full touch
Communication	RJ45-TCP/IP
Power	POE Switch (24V)
System	Linux system
Elevator	Elevator control device
Zone	Eight defense zones
Working Temp.	-20°C~70°C
Dimension	215*136*17mm

- ✓ Appel, interphone, déverrouillage, surveillance
- ✓ Appareil photo numérique avec image stable et claire
- ✓ Caméras HD avec vision nocturne
- ✓ Interphone TCP/IP entièrement numérique
- ✓ Système Linux, processeur ARM
- ✓ Langue personnalisée
- ✓ Installation murale/encastrée
- ✓ Prise en charge pour connecter jusqu'à 6 moniteurs d'intérieur
- ✓ Carte RFID/mot de passe/déverrouillage du moniteur intérieur

SYSTÈME IP

SYSTÈMES MULTI-APPARTEMENTS



- ✓ Boutons physiques Écran 4,3 pouces
- ✓ Appel, interphone, déverrouillage, surveillance
- ✓ Prise en charge de la connexion jusqu'à 9999 appartements
- ✓ Caméras HD, reconnaissance faciale
- ✓ Vision nocturne avec lumière led
- ✓ Interphone TCP/IP entièrement numérique
- ✓ Système Linux, processeur ARM
- ✓ Langue et fonctions personnalisées
- ✓ Installations murales/encastrées)
- ✓ Déverrouillage par carte RFID/mot de passe/reconnaissance faciale



888QZJ4A



888QFJ7F

888QZJ4A	
Material	Aluminum
Color	Silver/Gold
Solution	720P
Screen Display	4.3 inch screen
View Angle	120°
Power supply	DC12V
Working Temp.	-20°C~70°C
Card Type	IC Card, M1, S50, 13.56MHZ
Protection grade	IP33
Face recognition	Recognition rate 0.5 seconds;
Dimension	400*140*51mm

888QFJ7F	
Color	Silver/Gold
Screen Display	7 inch screen
Resolution	800*4801px
Screen Type	Full touch
Communication	RJ45-TCP/IP
Power	POE Switch (24V)
System	Linux system
Elevator	Elevator control device
Zone	Eight defense zones
Working Temp.	-20°C~70°C
Dimension	215*136*17mm

SYSTÈME ANALOGIQUE



- ✓ Appel, interphone, déverrouillage, surveillance
- ✓ Appareil photo numérique avec image stable et claire
- ✓ Prise en charge pour connecter jusqu'à 28 moniteurs d'intérieur
- ✓ Panneau en alliage d'aluminium/acier inoxydable de haute qualité
- ✓ Fonctionnement facile des boutons à pression directe
- ✓ Plaques signalétiques et boutons avec rétroéclairage bleu
- ✓ Imperméable, anti-vandalisme et durable
- ✓ Convient aux familles, villas, appartements, bureaux, hôpitaux et autres lieux
- ✓ Caméra réglable
- ✓ Caméra couleur HD Fonctionnement à un bouton



MK-591DC4 (1-25 Apartments)



4XBSZJC



4XBSZJD



4XBSZJA





4XBSZJB



MK270C4



MK930C4

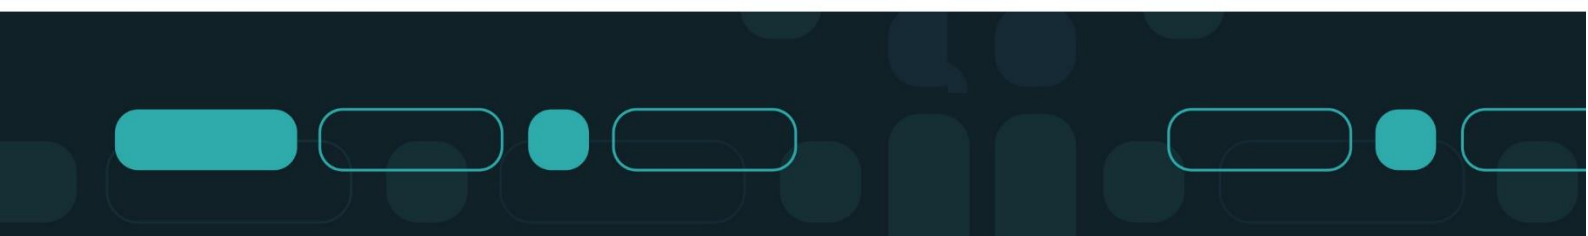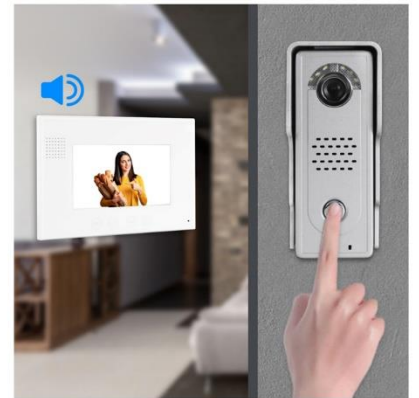



MK-270C4

Specification

MK-270C4	
Material	Aluminum alloy
Color	Silver/Black
Camera	700TVL
View Angle	90°
Power supply	DC 12V/15V/18V
Working current	135mA
Working Temp.	25°C ~ 65°C
Protection grade	IP55
Illumination	0.1Lux
Night light	4 x LEDs
Dimension	91*130*42mm



MK-660C4S

MK-660C4S	
Color	Black/White
Screen Display	7 inch screen
Material	Acrylic/ABS plastic
Screen Type	TFT-LCD
Resolution	800x480
System	4 Wire
Working voltage	DC 12V/32V
Working current	420mA
Working Temp.	-10°C~50°C
Installation	Surface mounted
Dimension	212*144*16mm



MK-930C4

Specification

MK-930C4	
Material	Zinc alloy
Color	Silver/Black
Camera	700TVL
View Angle	90°
Power supply	DC 12V/15V
Working current	100mA
Working Temp.	25°C ~ 65°C
Protection grade	IP55
Illumination	0.1Lux
Night light	6 x LEDs
Dimension	134*58*40mm



MK-660C4S

MK-660C4S	
Color	Black/White
Screen Display	7 inch screen
Material	Acrylic/ABS plastic
Screen Type	TFT-LCD
Resolution	800x480
System	4 Wire
Working voltage	DC 12V/32V
Working current	420mA
Working Temp.	-10°C~50°C
Installation	Surface mounted
Dimension	212*144*16mm



4XBSZJA

Specification

4XBSZJA	
Material	ABS
Color	Silver
Camera	1 Megapixel
View Angle	130°
Power supply	DC 12V
Input voltage	AC 100-240V
Power consumption	Standby ≤1W Working ≤5W
Working Temp.	20°C ~ 70°C
Working humidity	10% ~ 70%
Night light	6 LED infrared fill lights
Dimension	127.5*56*21mm



4XFJ7H

4XFJ7H	
Color	Black
Screen Display	7 inch screen
Material	Plastic case
Screen Type	TP touch screen
Resolution	800x480
System	4 Wire
Working voltage	DC 15V
Working Temp.	20°C ~ 70°C
Working humidity	10% ~ 70%
Installation	Wall hanging
Dimension	189*122*23mm



MK-591DC4

Specification

MK-591DC4	
Material	Aluminum alloy/ Stainless steel
Color	Silver
Camera	700TVL
View Angle	90°/ 170°
Power supply	DC 12V/15V/32V
Working current	165mA
Working Temp.	25°C ~ 65°C
Protection grade	IP55
Illumination	0.1Lux
Night light	8 x LEDs for 90°, 5 x LEDs for 170°
Installation	360*130*55mm




MK-560C4

MK-560C4	
Color	Black/White
Screen Display	7 inch screen
Material	Acrylic/ABS plastic
Screen Type	TFT-LCD
Resolution	800x480
System	4 Wire
Working voltage	DC 12V/15V/18V
Working current	420mA
Working Temp.	-10°C~50°C
Installation	Surface mounted
Dimension	241*161*25mm















Accessoires


	<p>4+2 port POE Switch</p> <ol style="list-style-type: none"> 100-220V access Support DIP VLAN 1-4 ports support POE Uplink port 2 100M electrical ports Built-in power supply 52V1.25A/24V3A Ethernet port transmission supports 250 meters 	<p>100QFS</p> <ol style="list-style-type: none"> Desktop External power supply DC5V1A Wavelength A-end 1310nm, B-end 1550nm, Fiber Interface SC Transmission distance 20KM 		<p>MK-12V3A</p> <ol style="list-style-type: none"> Powering the audio door phone Dimension: 218*161*73 mm For 2-wire system 	 <p>MK-T1</p> <ol style="list-style-type: none"> Metal shell Power off unlock
	<p>8+2 port POE Switch</p> <ol style="list-style-type: none"> 100-220V access Support DIP VLAN 1-8 ports support POE Uplink port 2 100M electrical ports Built-in power supply 52V1.25A/24V3A Ethernet port transmission supports 250 meters 	<p>YA-H1D</p> <ol style="list-style-type: none"> Metal shell, waterproof No key, with the card management Large capacity; 15,000 users External card reader 		<p>MK-138Z</p> <ol style="list-style-type: none"> Signal isolation protection Four/indoor units configure one decoder For 2-wire system 	 <p>MK-EB1</p> <p>Plastic Exit Button</p>
	<p>16+2 port POE Switch</p> <ol style="list-style-type: none"> Ports 1-16 support POE Desktop built-in power supply; Backplane bandwidth 2.0Gbps, Single port power supply 15.4W, The total power of the whole machine is 150W, The uplink port is two 100M electrical ports. 	<p>YA-M2</p> <ol style="list-style-type: none"> Metal shell, waterproof Touch the button 1000/4000 users Anti-flapping door External card reader 		<p>MK-D1</p> <ol style="list-style-type: none"> Metal shell Power on and unlock 	 <p>MK-EB2</p> <p>Metal Exit Button</p>
	<p>24+2 port POE Switch</p> <ol style="list-style-type: none"> PoE power output: DC 24V (15V/18V/24V optional) PoE single port power≤15W (Default 4,5(+)/7,8(-) power supply, 1,2(+)/3,6(-) power supply optional) PoE total power≤250W Downstream ports: 24 100/100Mbps RJ45 Upstream ports: 2 100/100Mbps RJ45 Built-in power supply 	<p>AZSK1</p> <ol style="list-style-type: none"> Swipe the card to open the door Use Tuya app to open the door, can only be used for supporting Android host, as a unit assistant access control Can not be used alone can not be used as a wall card swiping machine 		<p>MK-D2</p> <ol style="list-style-type: none"> Metal shell 2Power on and unlock Four-core cable, 2-core power supply/2-core signal 	 <p>F2</p> <ol style="list-style-type: none"> Used in building intercom system computer card issuing Product Type: IC card writer Port type: USB port Voltage current: Voltage 5V current 100mAh Support card: 125K/EM4100/1K4100 Working environment: -10°C-60°C Induction distance: 30-70mm Card reading speed: <0.2 seconds Read interval: <0.5 seconds.
	<p>1000JH8</p> <ol style="list-style-type: none"> 8 Gigabit Ethernet ports VLAN DV5V1A Metal shell Desktop 	<p>12V5A</p> <ol style="list-style-type: none"> Input:AC110-240V Output :DC12V 5A connect the lock 		<p>MK-B1</p> <ol style="list-style-type: none"> Metal shell Power off unlock 	 <p>ID/IC CARD</p> <p>keyfob</p>
	<p>1000JH16</p> <ol style="list-style-type: none"> 16 Gigabit Ethernet ports VLAN AC220V Metal shell Desktop, Built-in power supply 	<p>15V/2A</p> <ol style="list-style-type: none"> Power adapter for host power supply Remarks for placing an order: British, American, European, Australian plugs 		<p>MK-B2</p> <ol style="list-style-type: none"> Metal shell Power off unlock 	 <p>ID/IC CARD</p> <p>white card</p>
	<p>1000JH24</p> <ol style="list-style-type: none"> 24 Gigabit Ethernet ports VLAN AC220V Built-in power supply Metal case 1U rack mount 	<p>12V5A</p> <ol style="list-style-type: none"> Input a 220V, output of 12V power supply, Electrical locks can be connected with the access control interface. 		<p>MK-M1</p> <p>Magnetic lock</p>	 <p>MK-WC</p> <ol style="list-style-type: none"> Waterproof cover Customize different sizes according to different models

Moniteur intercom -Système IP

	<p>888QFJ4B</p> <ol style="list-style-type: none"> 4.3 inch screen with touch buttons Calling, intercom, unlocking, monitoring Night vision, LINUX System Ethernet RJ45 connector Call the elevator Eight defense zones Support POE 24V non-standard POE switch Dimension:198*125*15(mm) Install Method : Wall/magnetic hanging Install 		<p>888QFJ7L-1</p> <ol style="list-style-type: none"> 7 inch touch screen Calling, intercom, unlocking, monitoring Night vision, LINUX System Ethernet RJ45 connector Call the elevator Eight defense zones Support POE 24V non-standard POE switch Dimension:220*142*20(mm) Install Method : Wall/magnetic hanging Install 		<p>888QFJ7H</p> <ol style="list-style-type: none"> 7 inch touch screen Calling, intercom, unlocking, monitoring Night vision, LINUX System Ethernet RJ45 connector Call the elevator Eight defense zones Support POE 24V non-standard POE switch Dimension:188.1*121*21.6(mm) Install Method : Wall/magnetic hanging Install
	<p>888QFJ4C</p> <ol style="list-style-type: none"> 4.3 inch screen with physical buttons Calling, intercom, unlocking, monitoring Night vision, LINUX System Ethernet RJ45 connector Call the elevator Eight defense zones Support POE 24V non-standard POE switch Dimension:180*110*20(mm) Install Method : Wall/magnetic hanging Install 		<p>888QFJ7L-2</p> <ol style="list-style-type: none"> 7 inch screen with physical buttons Calling, intercom, unlocking, monitoring Night vision, LINUX System Ethernet RJ45 connector Call the elevator Eight defense zones Support POE 24V non-standard POE switch Dimension:220*142*20(mm) Install Method : Wall/magnetic hanging Install 		<p>888QFJ10A</p> <ol style="list-style-type: none"> 10 inch touch screen Calling, intercom, unlocking, monitoring Night vision, LINUX System Ethernet RJ45 connector Call the elevator Eight defense zones Support POE 24V non-standard POE switch Dimension:285*180*20(mm) Install Method : Wall/magnetic hanging Install
	<p>888QFJ7A-1</p> <ol style="list-style-type: none"> 7 inch touch screen Calling, intercom, unlocking, monitoring Night vision, LINUX System Ethernet RJ45 connector Call the elevator Eight defense zones Support POE 24V non-standard POE switch Dimension:215*136*16(mm) Install Method : Wall/magnetic hanging Install 		<p>888QFJ7F</p> <ol style="list-style-type: none"> 7 inch touch screen Calling, intercom, unlocking, monitoring Night vision, LINUX System Ethernet RJ45 connector Call the elevator Eight defense zones Support POE 24V non-standard POE switch Dimension:215*136*17(mm) Install Method : Wall/magnetic hanging Install 		<p>138DF3</p> <ol style="list-style-type: none"> Physical buttons Materials: Plastic panel Intercom, unlock Calling Time: 80S
	<p>888QFJ7A-2</p> <ol style="list-style-type: none"> 7 inch screen with physical buttons Calling, intercom, unlocking, monitoring Night vision, LINUX System Ethernet RJ45 connector Call the elevator Eight defense zones Support POE 24V non-standard POE switch Dimension:215*136*16(mm) Install Method : Wall/magnetic hanging Install 		<p>888QFJ7G-1</p> <ol style="list-style-type: none"> 7 inch button screen Calling, intercom, unlocking, monitoring Night vision, LINUX System Ethernet RJ45 connector Call the elevator Eight defense zones Support POE 24V non-standard POE switch Dimension:200*140*16(mm) Install Method : Wall/magnetic hanging Install color: silver/black/golden/grey 		<p>888QFJ7G-2</p> <ol style="list-style-type: none"> 7 inch touch screen Calling, intercom, unlocking, monitoring Night vision, LINUX System Ethernet RJ45 connector Call the elevator Eight defense zones Support POE 24V non-standard POE switch Dimension:200*140*16(mm) Install Method : Wall/magnetic hanging Install color: silver/black/golden/grey
	<p>888QFJ7B</p> <ol style="list-style-type: none"> 7 inch touch screen Calling, intercom, unlocking, monitoring Night vision, LINUX System Ethernet RJ45 connector Call the elevator Eight defense zones Support POE 24V non-standard POE switch Dimension:215*136*17(mm) Install Method : Wall/magnetic hanging Install 				

Moniteur intérieur -Système Analogique

 <p>①</p>	<p>888FJ4B</p> <ol style="list-style-type: none"> 4.3 inch screen with physical buttons Calling, intercom, unlocking, monitoring High temperature resistant oil injection panel POE switch power supply High quality screen & high-end glass lens Digital camera, stable and clear image shooting Dimension:130*125*15(mm) Install Method: Wall/magnetic hanging Install 	 <p>⑥</p>	<p>888QJ7L</p> <ol style="list-style-type: none"> 7 inch screen with physical buttons Calling, intercom, unlocking, monitoring High temperature resistant oil injection panel Golden and white color optional POE switch power supply Digital camera, stable and clear image shooting Dimension:220*142*20(mm) Install Method: Wall/magnetic hanging Install 	 <p>⑪</p>	<p>4XFJ7G</p> <ol style="list-style-type: none"> 7 inch TFT LCD panel display with physical buttons No radiation and low power consumption True high-definition widescreen display Indoor mutual intercom function. Avoiding disturb during the rest time Image brightness, contrast, and ring volume adjustable Ultra-thin design,stylish style and high quality The available distance is 100M
 <p>②</p>	<p>888FJ4C</p> <ol style="list-style-type: none"> 4.3 inch screen with physical buttons Calling, intercom, unlocking, monitoring High temperature resistant oil injection panel POE switch power supply High quality screen & physical buttons Digital camera, stable and clear image shooting Dimension:130*110*20(mm) Install Method: Wall/magnetic hanging Install 	 <p>⑦</p>	<p>4XFJ4B</p> <ol style="list-style-type: none"> 4.3 inch TFT LCD panel display with physical buttons No radiation and low power consumption True high-definition widescreen display Indoor mutual intercom function. Avoiding disturb during the rest time Image brightness, contrast, and ring volume adjustable Ultra-thin design,stylish style and high quality The available distance is 100M 	 <p>⑫</p>	<p>4XFJ7K</p> <ol style="list-style-type: none"> 7 inch TFT LCD panel display with physical buttons No radiation and low power consumption True high-definition widescreen display Indoor mutual intercom function. Avoiding disturb during the rest time Image brightness, contrast, and ring volume adjustable Ultra-thin design,stylish style and high quality The available distance is 100M
 <p>③</p>	<p>888FJ65A</p> <ol style="list-style-type: none"> 6.5 inch screen with physical buttons Calling, intercom, unlocking, monitoring High temperature resistant oil injection panel POE switch power supply High quality screen & high-end glass lens Digital camera, stable and clear image shooting Dimension:196*133*22(mm) Install Method: Wall/magnetic hanging Install 	 <p>⑧</p>	<p>4XFJ4C</p> <ol style="list-style-type: none"> 4.3 inch TFT LCD panel display with physical buttons No radiation and low power consumption True high-definition widescreen display Indoor mutual intercom function. Avoiding disturb during the rest time Image brightness, contrast, and ring volume adjustable Ultra-thin design,stylish style and high quality The available distance is 100M 	 <p>⑬</p>	<p>4XFJ7H</p> <ol style="list-style-type: none"> 7" high resolution color TFT LCD touch screen No radiation and low power consumption True high-definition widescreen display Indoor mutual intercom function. Avoiding disturb during the rest time Image brightness, contrast, and ring volume adjustable Ultra-thin design,stylish style and high quality. The available distance is 100M. Taking photos and recording videos in real time
 <p>④</p>	<p>888FJ7A</p> <ol style="list-style-type: none"> 7 inch screen with physical buttons Calling, intercom, unlocking, monitoring High temperature resistant oil injection panel Golden and white color optional POE switch power supply Digital camera, stable and clear image shooting Dimension:215*136*16(mm) Install Method: Wall/magnetic hanging Install 	 <p>⑨</p>	<p>4XFJ7B</p> <ol style="list-style-type: none"> 4.3 inch TFT LCD panel display with touch buttons No radiation and low power consumption True high-definition widescreen display Indoor mutual intercom function. Avoiding disturb during the rest time Image brightness, contrast, and ring volume adjustable Ultra-thin design,stylish style and high quality The available distance is 100M 	 <p>⑭</p>	<p>4XFJ7I</p> <ol style="list-style-type: none"> 7" high resolution color TFT LCD screen with physical button No radiation and low power consumption True high-definition widescreen display Indoor mutual intercom function. Avoiding disturb during the rest time Image brightness, contrast, and ring volume adjustable Ultra-thin design,stylish style and high quality. The available distance is 100M. Taking photos and recording videos in real time
 <p>⑤</p>	<p>888FJ7B</p> <ol style="list-style-type: none"> 7 inch screen with touch buttons Calling, intercom, unlocking, monitoring High temperature resistant oil injection panel POE switch power supply High quality screen Digital camera, stable and clear image shooting Dimension:215*136*17(mm) Install Method: Wall/magnetic hanging Install 	 <p>⑩</p>	<p>4XFJ7L</p> <ol style="list-style-type: none"> 4.3 inch TFT LCD panel display No radiation and low power consumption True high-definition widescreen display Indoor mutual intercom function. Avoiding disturb during the rest time Image brightness, contrast, and ring volume adjustable Ultra-thin design,stylish style and high quality The available distance is 100M 		

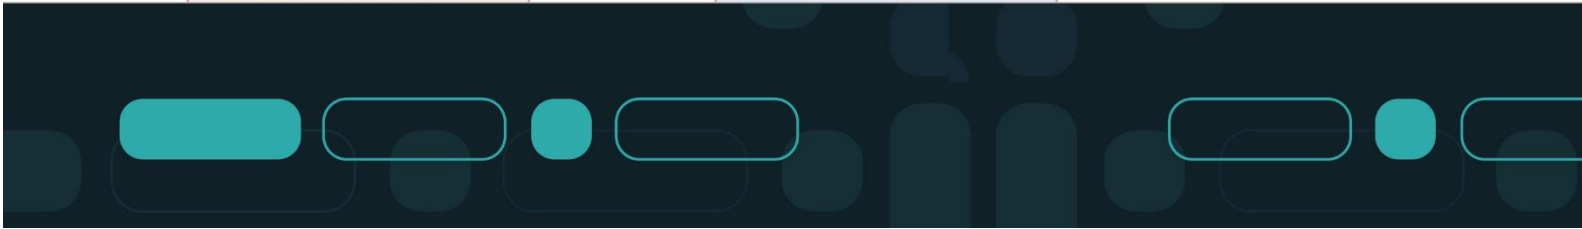



 781211313  commercial@elinett.com | info@oceanic-sn.com

 www.elinett.com | www.oceanic-sn.com

 Dakar, Mermoz, Rue MZ 146 N°7184